

# AC 703

Cummins  
Mecc Alte  
D+ &



ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$



2000/14/EC

\$\$\$#( #

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	700,00	560,00	638,00	510,00	920,00

fDGL

GC ; ) &

, ) & z

fDGL

z&(

GC

## Standard Specifications

(\*#\$\$

z

fl

!

z

## ALTERNATOR

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

!

## TRANSFER SWITCH

f) \$\$# \$\$\$

fl " " \$

# AC 703

Cummins  
Mecc Alte  
D+' &'

Manufacturer		Cummins		
Model		VTA 28 G5		
		%\$\$' "# "		
		*%&' "		
		Q &\$<DQ		
	L	28,00		
	"	140 x 152		
		13,1:1		
	fl # ı	"# "	1500	
	fl ı	L	83,00	
		L	176,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	53,00		
	' # "	850		
fl ' # ı	' # "	123,00		
	° C	507		
		24 V d.c.		
	Load	%\$\$ı	'+)ı	)\$ı
	# "			
		140,00	104,00	73,00


		Mecc Alte		
		ECP 40-2L		
	Hz	50		
	"	680		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	981		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 703	5590	4000	1420	2160	900
		fl ı		fl ı	
	"	"	"	"	L
AK 85	7190	5800	1620	2550	1150

AC 703

Cummins  
Mecc Alte  
D+ &

1 D+ &

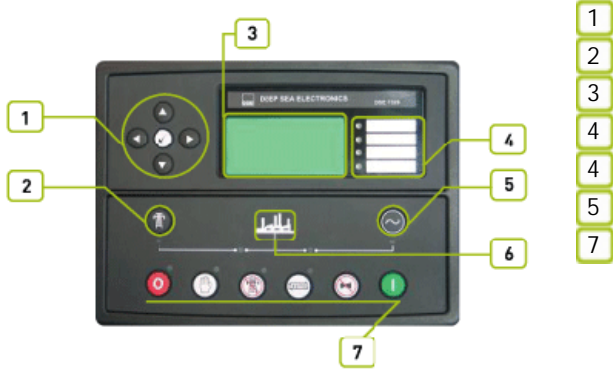

2

8G9ž + &\$ž )5ž&&\$#(\$

3

4

5

8G9+' &\$ ž  
)\$ ž

8G9+' &\$ ž

8G9+' &\$ ž

% &1 \*( ž

žFG' &žFG(, ) ž

# AC 703

Cummins  
Mecc Alte  
D+ &''

f@z@Bl  
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'\*\$-)\$

6G'9B'\*\$\$\$!\*!&

6G'9B'\*\$\$\$!\*!(

f&)(, t

f&%) +t

f&% \$t

GA 8

%, !&\* \$

)  
&(\$)

ž

ž

!&(

"

ž

ž

"

"

# AC 703

Cummins  
Mecc Alte  
D+ &''

5? , ) !'



- 1
- 2
- 3
- 4
- 4
- 5
- 7
- 8
- 9
- 10

fl \$\$\$! '%&\$\$' Ł

'&\$\$\$#%(/# "

	"	1620
fl "Ł	"	5800
fl "Ł	"	2550
		1150